

## Touch Screen VGA Extender Kit

The VDE-300 system simplifies installation by allowing the PC server to be sited centrally in a secure place, then extending the signal up to 300m to a touch screen display.


The video (VGA) and data (RS232) signals are extended via low cost Cat5e/Cat6 cable.

### Features:

- Bi-directional serial RS232 (Tx/Rx) control
- Remote & local monitor simultaneous display
- Software-free design
- Supports VGA, SVGA, XGA, TFT-LCD & DDC2B
- Focus & Gain Controls for improved image
- Supplied as a pair (Transmitter & Receiver)



### Typical Configurations:

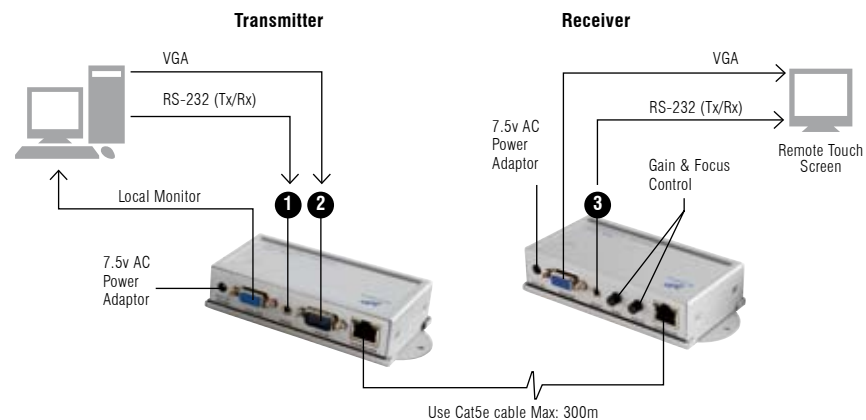

### Specifications:

#### VDE-300T/R:

Model:	Transmitter:	Receiver:
Description	One-port VGA & data extender transmitter	One-port VGA & data extender receiver
AV Inputs	VGA x 1, RS232 x 1	RJ-45 x 1
AV Outputs	VGA x 1, RJ-45 x 1	VGA x 1, RS232 x 1
Video Control	-	Gain/Focus
LED	TX-RX	TX-RX
Power Input	7.5v AC	7.5v AC
Video Quality (max)	1280 x 1024 x 60Hz @ 300m, 1600 x 1200 x 60Hz @ 200m	1280 x 1024 x 60Hz @ 300m, 1600 x 1200 x 60Hz @ 200m
Dimensions	29(H) x 113(W) x 62(D) mm	29(H) x 113(W) x 62(D) mm

### Cables included with this kit:

